

UNCLASSIFIED

AD NUMBER
AD811915
NEW LIMITATION CHANGE
TO Approved for public release, distribution unlimited
FROM Distribution authorized to U.S. Gov't. agencies and their contractors; Critical Technology; MAR 1967. Other requests shall be referred to RADC [EMATA] GAFB, NY 13440.
AUTHORITY
radc usaf notice, Apr 1970

THIS PAGE IS UNCLASSIFIED

811915
CT6118

RADC-TR-67-12
First Quarterly Report




AN IMPROVED POINT-SOURCE COMPACT ANTENNA RANGE

Albert L. Holliman
Engineering Experiment Station
Georgia Institute of Technology

TECHNICAL REPORT NO. RADC-TR- 67-12
March 1967

This document is subject to special export controls and each transmittal to foreign governments, foreign nationals or representatives thereto may be made only with prior approval of RADC (EMLI), GAFB, N.Y. 13440

Each transmittal of this document outside the agencies of the U. S. Government must have prior approval of RADC (EMATA), GAFB, N.Y. 13440

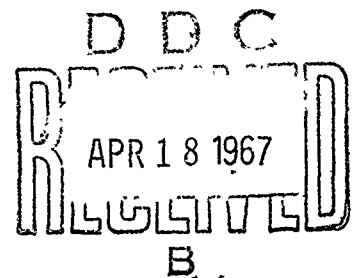

Rome Air Development Center
Research and Technology Division
Air Force Systems Command
Griffiss Air Force Base, New York

When US Government drawings, specifications, or other data are used for any purpose other than a definitely related government procurement operation, the government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded, by implication or otherwise, as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacturer, use, or sell any patented invention that may in any way be related thereto.

Do not return this copy. Retain or destroy.

AN IMPROVED POINT-SOURCE COMPACT ANTENNA RANGE

Albert L. Holliman
Engineering Experiment Station
Georgia Institute of Technology

This document is subject to special export controls and each transmittal to foreign governments, foreign nationals or representatives thereto may be made only with prior approval of RADC (EMLI), GAFB, N.Y. 13440

Each transmittal of this document outside the agencies of the U. S. Government must have prior approval of RADC (EMATA), GAFB, N.Y. 13440

FOREWORD

This interim report was prepared by Albert L. Holliman of Georgia Institute of Technology, Engineering Experiment Station, Atlanta, Georgia, under Contract AF30(602)-4269, project number 4506, task number 450604. Reporting period covered May 66 to December 66. RADC project engineer is Martin Jaeger (EMATA).

The distribution of this report is limited because the information provided on a unique antenna measurement technique does not warrant its release to the general public.

This report has been reviewed and is approved.

Approved:

Martin Jaeger
MARTIN JAEGER
Project Engineer
Antenna & Coherent Optical Section

Approved:

Arthur J. Frohlich
ARTHUR J. FROHLICH
Chief, Techniques Branch
Surveillance & Control Division

ABSTRACT

A point-source "compact antenna range" was modified by installing a range reflector having a more accurate surface contour and by shielding the reflector edge and its feed with absorbing material. Stray radiation measurements and pattern measurements were made within the band from 8.2 to 12.0 GHz using a 30-inch paraboloidal test antenna. Results are compared with those obtained on a previously constructed range, and they demonstrate that the range performance was improved. Measured maximum stray radiation levels on the modified range vary from about -44 dB to about -58 dB with respect to the collimated radiation. Radiation patterns compare very favorably with those measured on a 700-foot outdoor antenna range.

TABLE OF CONTENTS

	Page
I. INTRODUCTION	1
II. THE POINT-SOURCE RANGE	3
A. Range Description	3
B. Feed Horn	3
C. Reflector	6
III. RANGE EVALUATION	8
A. Stray Radiation	8
B. Pattern Comparisons	11
IV. CONCLUSIONS	15
REFERENCES	16

ILLUSTRATIONS

Figure	Page
1. Modified point-source compact antenna range (PSR-2)	4
2. Feed horn, absorber-material shielding, and test antenna on the modified point-source range	5
3. Maximum stray radiation levels as a function of azimuth angle of the test antenna as measured on the modified point-source range (PSR-2).	9
4. Maximum stray radiation levels as a function of azimuth angle of the test antenna as measured on the previous point-source range (PSR-1).	10
5. Composite set of azimuth patterns recorded on the modified point-source compact range (PSR-2) at 10 GHz	12
6. Composite set of azimuth patterns recorded on the previous point-source compact range (PSR-1) at 10 GHz	13
7. Comparison of the azimuth patterns on the outdoor range and on the modified point-source compact range at 10 GHz .	14

Section I

INTRODUCTION

Techniques which enable measurements with radar and other full-size microwave antennas to be made on indoor "compact antenna ranges" have been demonstrated previously.¹ A range reflector and special feed system close to the test antenna are used to produce incident plane waves, and far-zone results are obtained.

A point-source compact antenna range consists of a paraboloidal range reflector and its associated feed which transmit collimated microwave energy for the illumination of the antenna under test. In addition to the collimated energy, there is "stray" radiation which adds both in and out of phase with the collimated energy and thus perturbs the desired plane wave. There are many sources of stray radiation from paraboloidal antennas; among these are reflection and diffraction from the feed and its support, back radiation from the feed, edge effects of the reflector, and phase effects due to the contour errors of the reflector. The presence of these sources of stray radiation requires that considerable care be taken when designing a compact range to insure that stray radiation is reduced to a very low level.

The work described in this report was conducted to reduce the stray radiation on a previously constructed point-source compact antenna range.¹ The range was modified by installing a more accurate parabolic

reflector and by shielding the reflector edge and its feed with absorbing material. (For clarity, the previous range and the modified range hereafter will be referred to as PSR-1 and PSR-2, respectively.) Some of the operating characteristics of the improved point-source range at X-band frequencies are described below, and a comparison is made with the corresponding results previously obtained.

Section II

THE POINT-SOURCE RANGE

A. Range Description

The modified point-source compact antenna range is shown in Figures 1 and 2. It consists of a 10-foot paraboloidal range reflector which is illuminated by a special waveguide feed horn. A 30-inch paraboloidal dish, mounted on an azimuth-over-elevation positioner, is shown as the test antenna, and the positioner is mounted on a movable table which travels on two sets of orthogonally oriented tracks. This arrangement allows movement of the test antenna to any position inside a 4-foot square floor area.

B. Feed Horn

The feed horn is an open-ended waveguide surrounded by a pyramidal horn in which the internal walls are lined with absorbing material. In order to reduce reflection and diffraction from the feed and its supports, the feed is oriented such that the peak of the feed horn radiation pattern is aimed at the center of the top half of the reflector. The open-ended waveguide then gives approximately uniform illumination in the upper portion of the reflector, and the absorbing material within the surrounding pyramidal horn causes the radiation to drop off sharply for low illumination at the edges of the reflector and

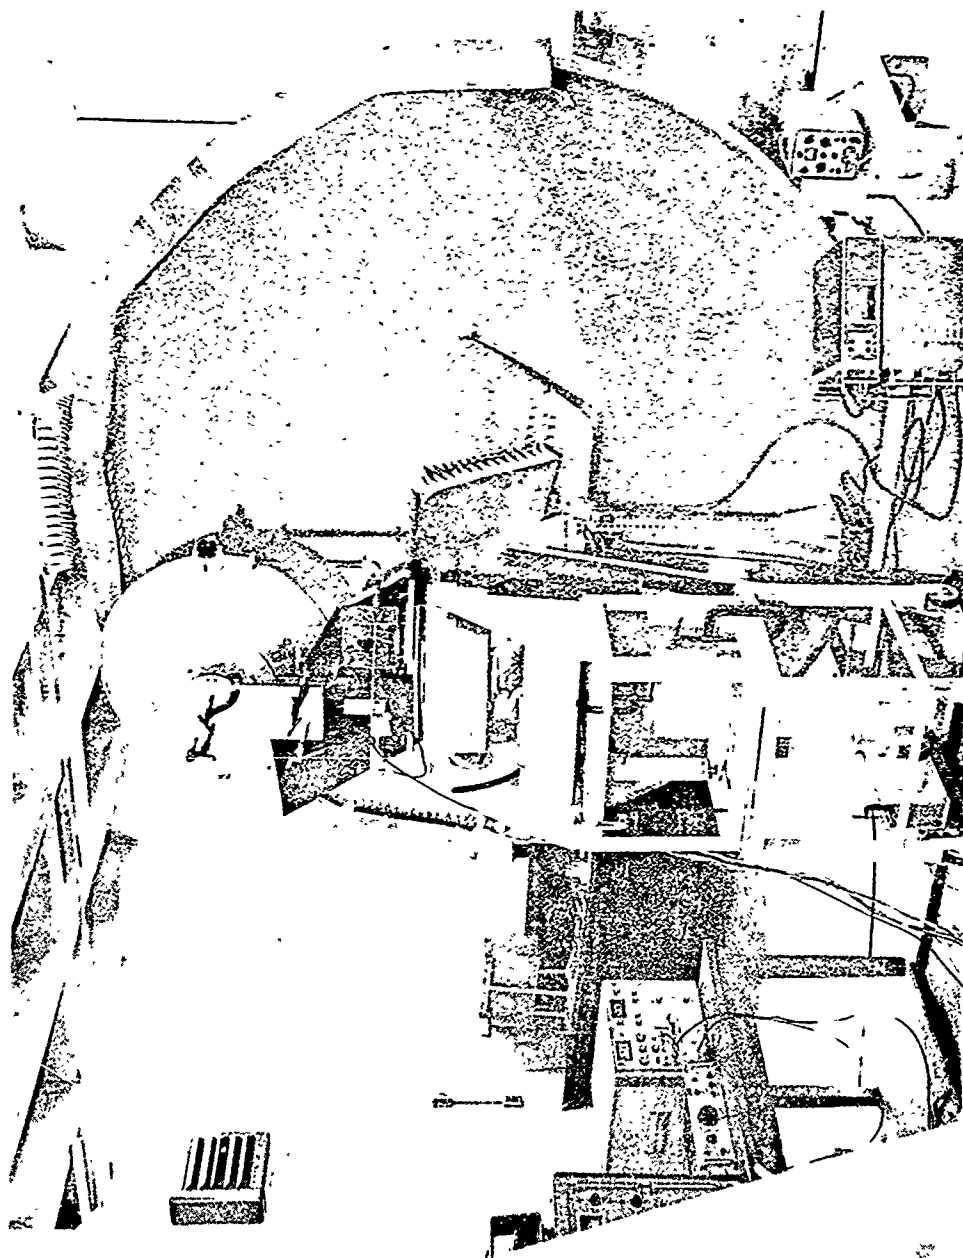


Figure 1. Modified point-source compact antenna range (PSR-2)

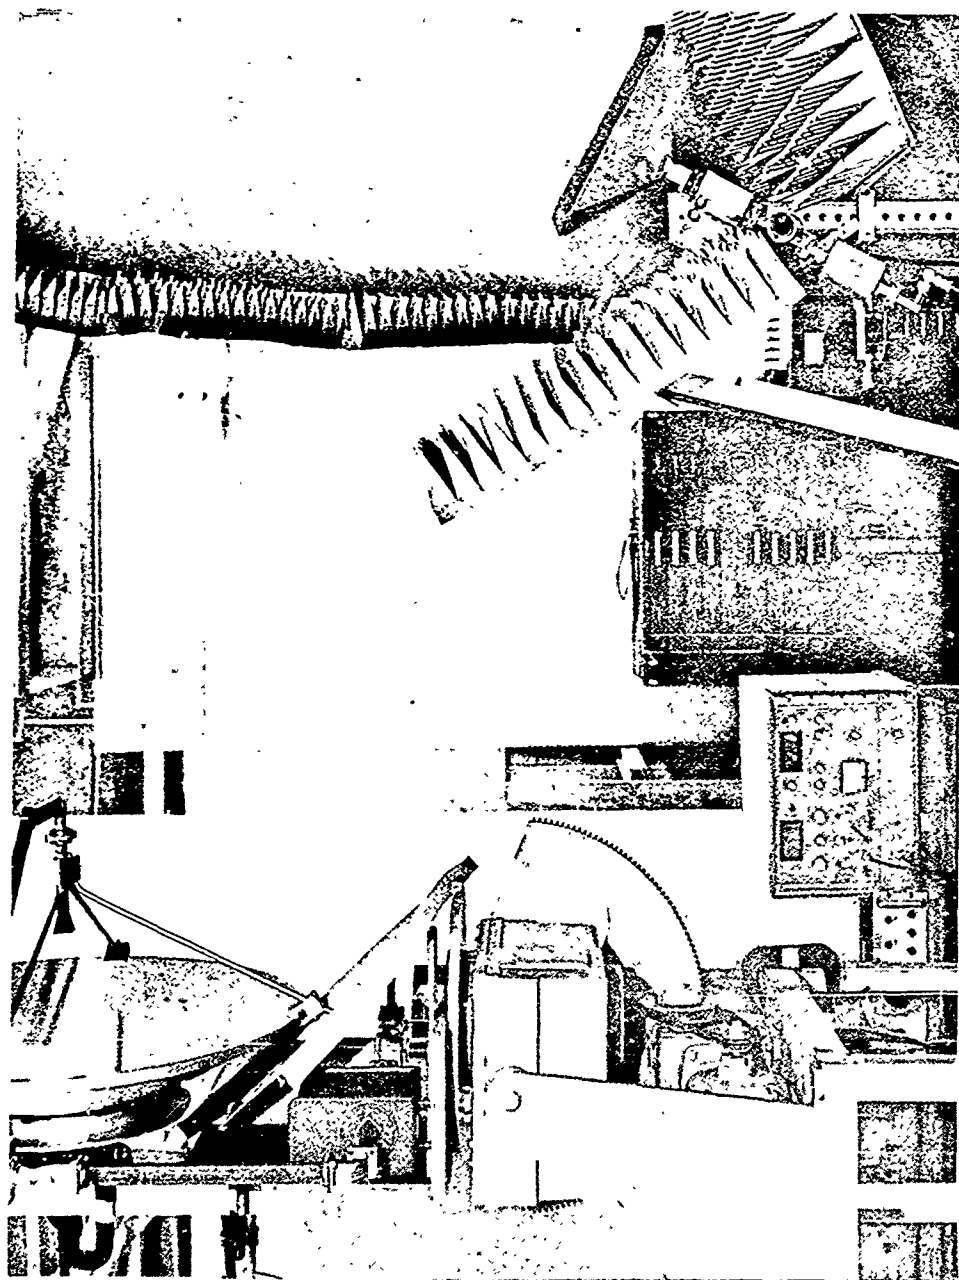


Figure 2. Feed horn, absorber-material shielding, and test antenna on the modified point-source range.

for low back radiation. Hence, the main beam of collimated energy comes off the reflector above the feed horn, and only the upper portion of the range reflector is actually used, as can be seen in Figure 1. Additional absorbing material is located behind and below the feed-horn assembly to further reduce back radiation and diffraction from the feed and its supports.

C. Reflector

As mentioned above, the reflector on the modified range (PSR-2) is more accurate than that on the previous range (PSR-1). The characteristics of the range reflectors are the following:

	<u>PSR-1</u>	<u>PSR-2</u>
Diameter	10 feet	10 feet
Focal Length	35.8 inches	30 inches
Contour Tolerance	<u>+0.060</u> inch	<u>+0.002</u> inch.

It should be noted that the above tolerances are those specified by the manufacturer. Some efforts were made at Georgia Tech to verify the contour accuracy of the PSR-2 reflector, and the results indicate that the surface errors are considerably greater than + 0.002 inch. It will be shown later that the stray radiation on the range was considerably reduced after the installation of the more accurate reflector. This indicates that errors in the reflector surface are a significant source of stray radiation.

The discontinuity at the edge of the reflector interrupts the normal flow of currents on the reflector surface and also produces stray radiation not in phase with that from the principal reflector surface. This stray radiation was significantly reduced by the location of absorbing material around the periphery of the upper half of the reflector as shown in Figure 1.

Section III

RANGE EVALUATION

A. Stray Radiation

The procedure for measuring stray radiation levels is the same as that previously employed.¹ The test antenna was positioned to receive power on a particular side lobe, and then it was moved along the direction of propagation of the collimated energy. This movement changed the relative phase between the collimated radiation and the stray radiation, thus causing variations in the apparent level of the side lobe. To a first approximation, the change in the apparent level of the side lobe is caused by the stray radiation received by the main lobe of the test antenna. The peak-to-peak variation (with movement of the test antenna) of a particular side lobe can be used to calculate the magnitude of stray radiation coming from the direction in which the main lobe is pointing.² Thus, by following the above procedure for each side lobe, the stray radiation can be measured as a function of the azimuth angle of the test antenna. The maximum value of the side lobe variations were used to calculate the stray radiation levels; therefore, the measurements indicate maximum stray radiation levels.

A typical plot of stray radiation level versus azimuth angle for the PSR-2 is shown in Figure 3. This can be compared with a similar plot for the PSR-1 which is shown in Figure 4. These figures demonstrate

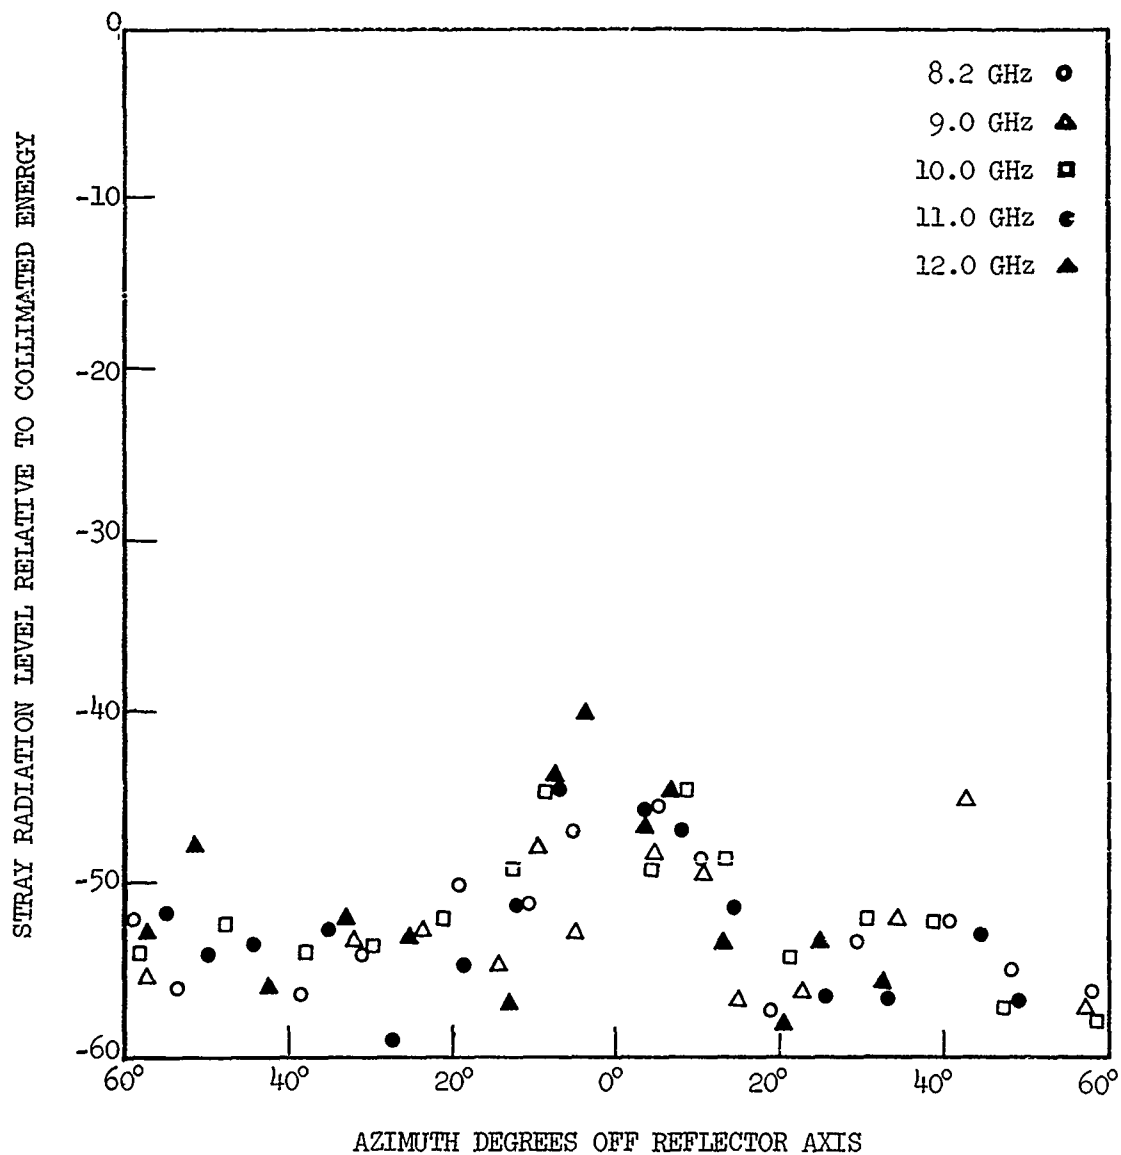


Figure 3. Maximum stray radiation levels as a function of azimuth angle of the test antenna as measured on the modified point-source range (PSR-2).

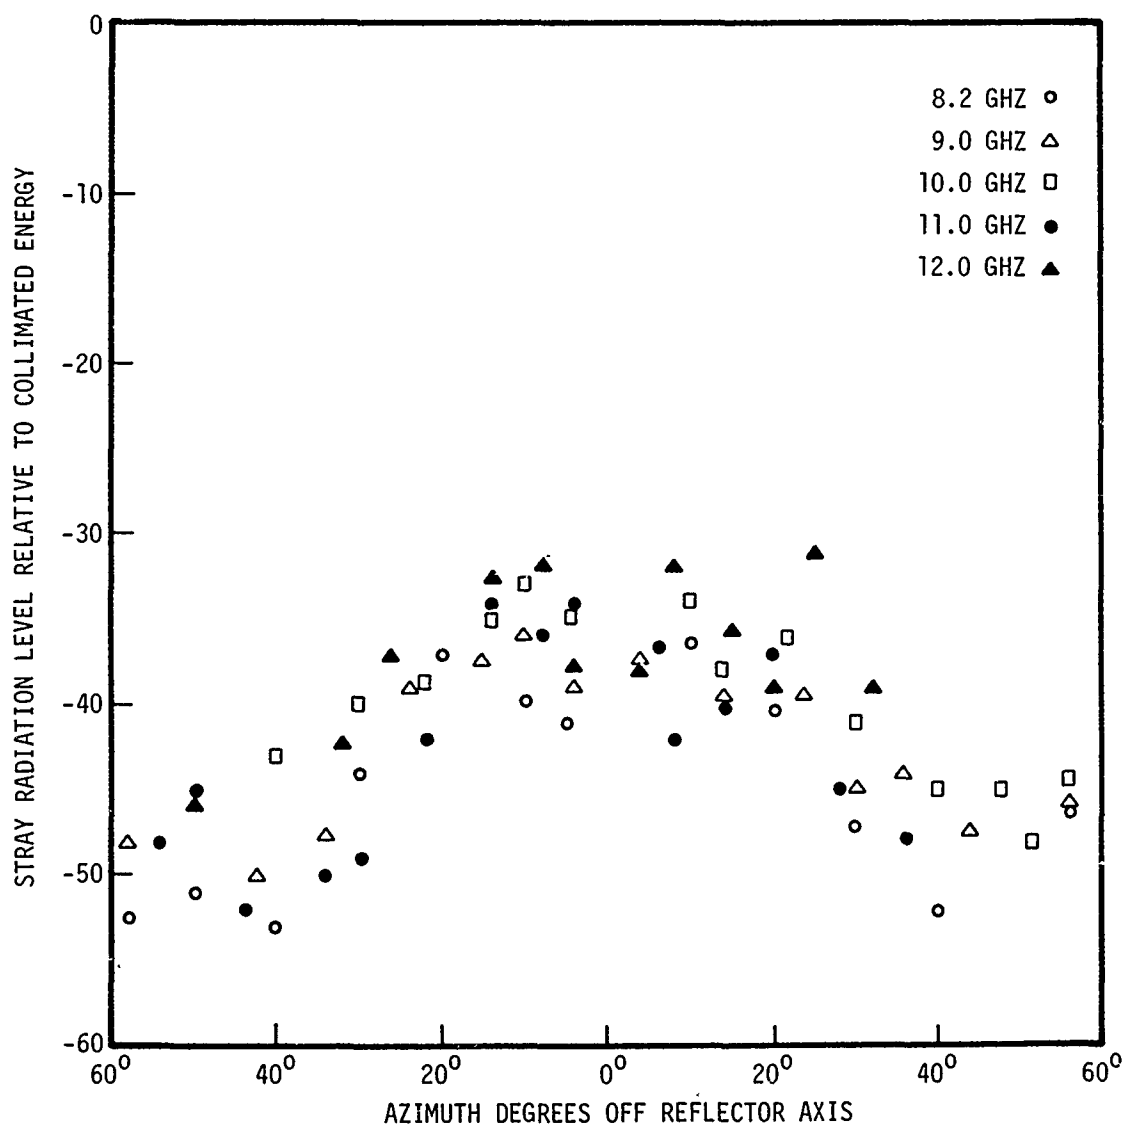


Figure 4. Maximum stray radiation levels as a function of azimuth angle of the test antenna as measured on the previous point-source range (PSR-1).

that the stray radiation on the PSR-2 has been reduced by approximately 10 dB relative to that on the PSR-1.

A further indication of improvement in range performance can be seen by comparing the composite sets of patterns in Figures 5 and 6. Each of the patterns in each set was recorded with the test antenna located at a different position within the test area. It can be seen that variations in the measured side-lobe peaks and nulls are less on the PSR-2 than on the PSR-1.

B. Pattern Comparisons

A set of radiation patterns of the 30-inch test antenna was recorded on the modified point-source compact range and was compared with a similar set of patterns previously recorded on a 700-foot outdoor range. A typical comparison is illustrated in Figure 7 and shows that the patterns for the two ranges compare very favorably.

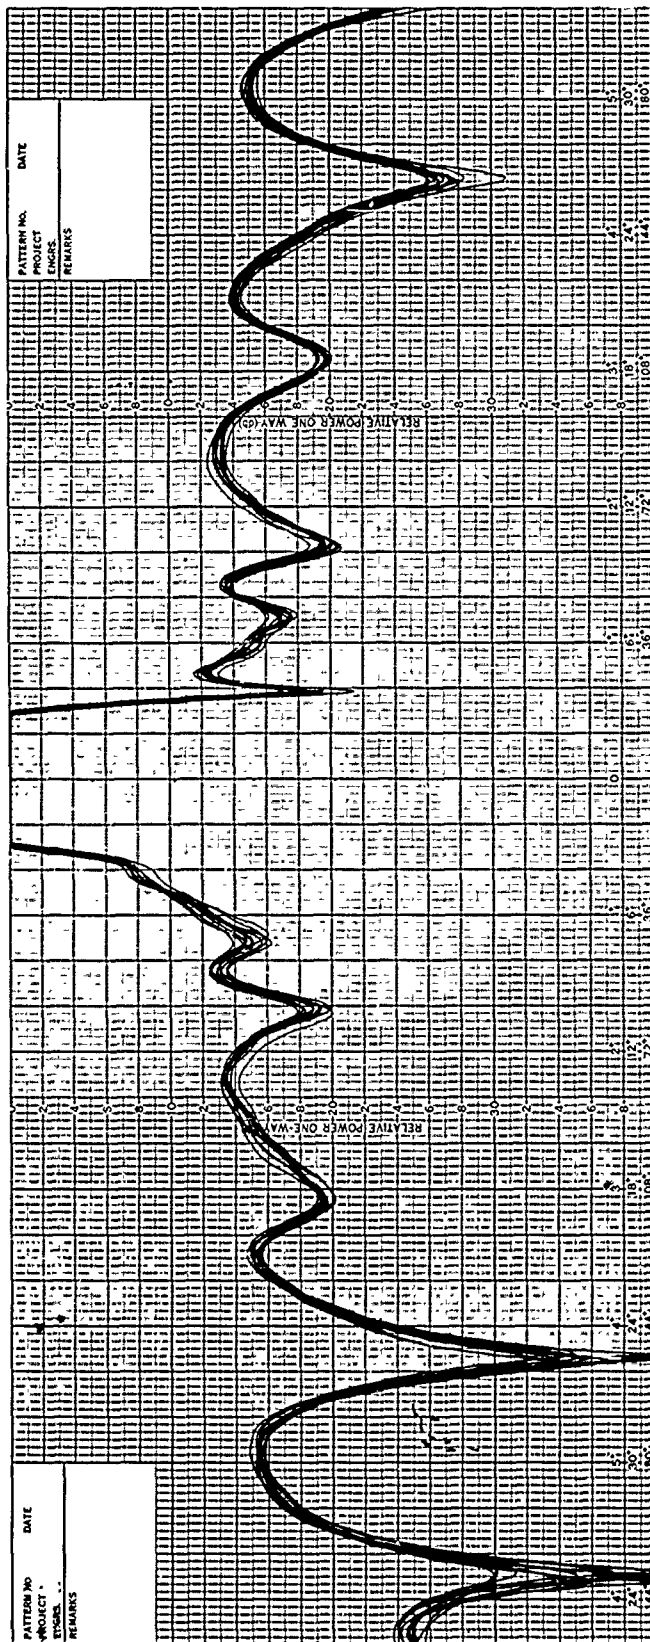


Figure 5. Composite set of azimuth patterns recorded on the modified compact range (FSR-2) at 10 GHz. Each of the ten patterns was recorded with the test antenna located at a different position within the test area. The gain level at the top of the chart is -13 dB relative to the peak of the main lobe.

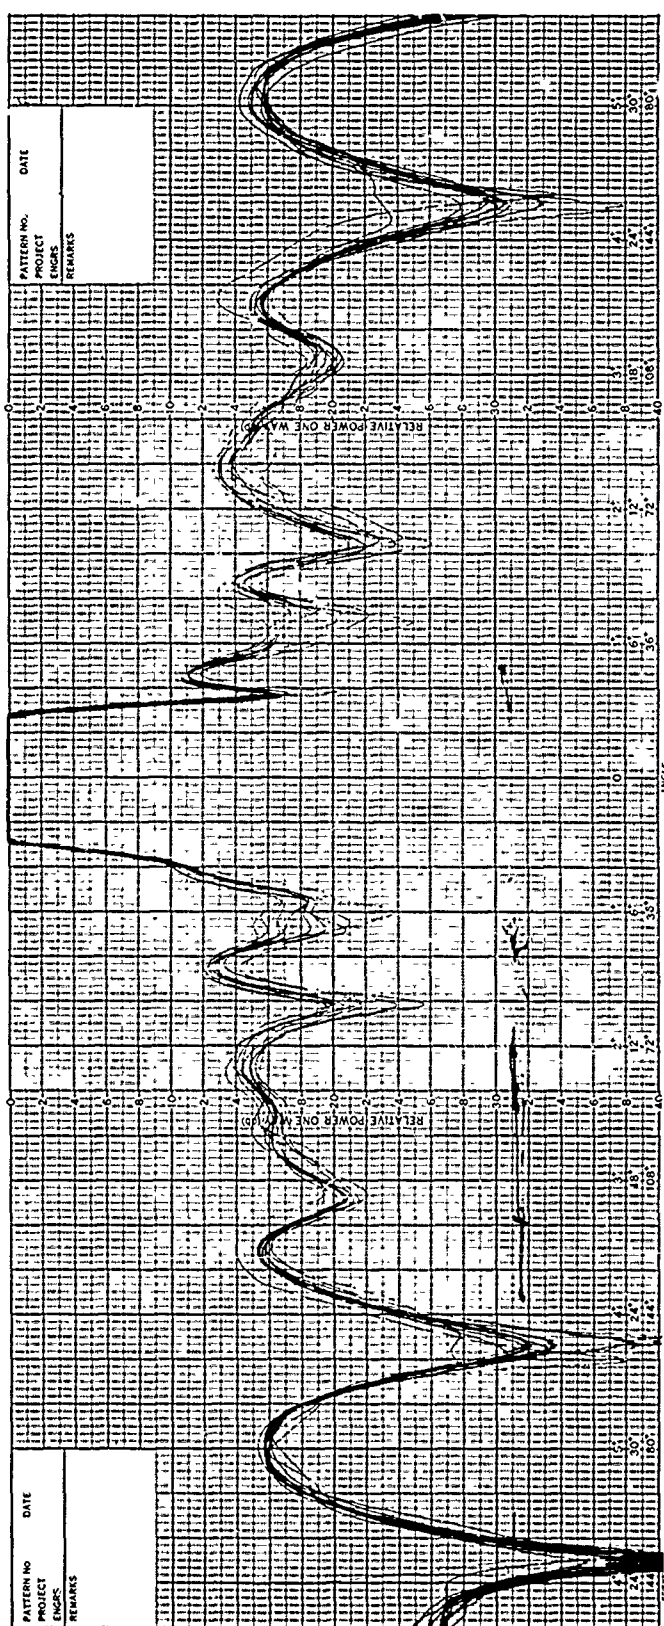


Figure 6. Composite set of azimuth patterns recorded on the previous point-source compact range (PSR-1) at 10 GHz. Each of the ten patterns was recorded with the test antenna located at a different position within the test area. The gain level at the top of the chart is -13 dB relative to the peak of the main lobe.

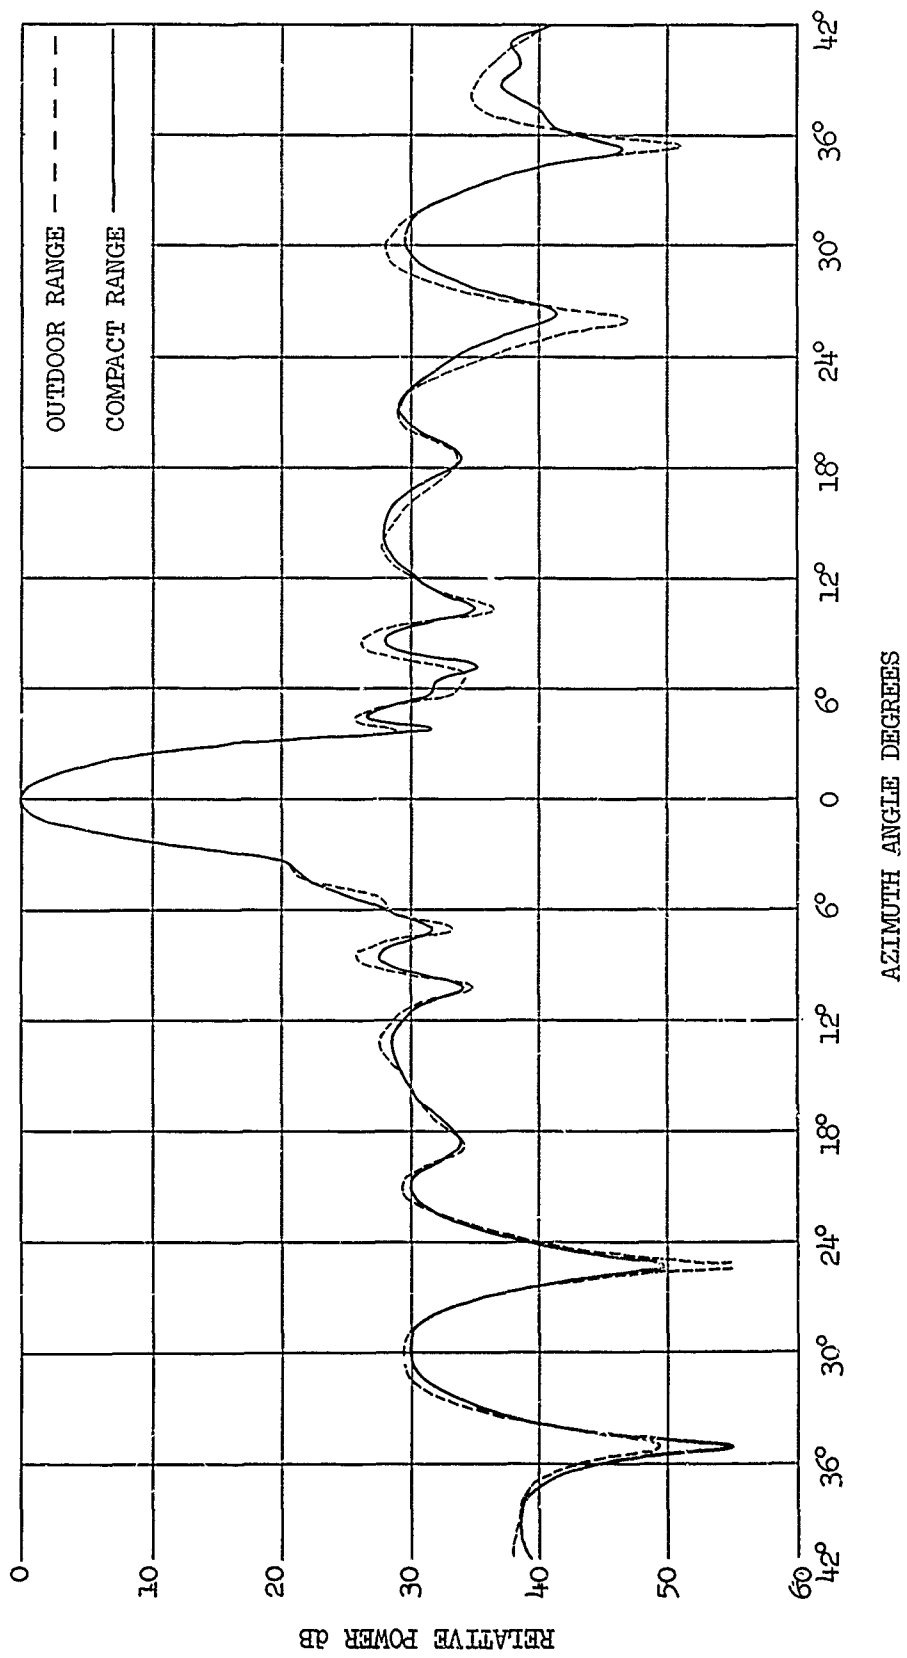


Figure 7. Comparison of the azimuth patterns on the outdoor range and on the modified point-source compact range at 10 GHz.

Section IV

CONCLUSIONS

The results of the work described in this report demonstrate that the performance of the point-source compact antenna range was improved. Stray radiation at X-band frequencies was reduced approximately 10 dB on the modified point-source range as compared with the previous range; this reduction in stray radiation increases the accuracy of antenna pattern measurements. The above results were obtained by utilizing a range reflector having a more accurate contour tolerance and by shielding the reflector edge and feed with additional absorbing material.

Research work is continuing on this contract to improve the line-source compact range which was described previously,¹ and additional studies of the point-source range will be made at C- and S-band frequencies.

REFERENCES

1. R. C. Johnson and R. J. Poinsett, Compact Antenna Range Techniques, Final Report on Contract No. AF 30(602)-3594, Rome Air Development Center, Griffiss Air Force Base, New York; April 1966.
2. E. F. Buckley, "Outline of Evaluation Procedures for Microwave Anechoic Chambers," Microwave Journal; August 1963, pp. 69-75.

Unclassified

Security Classification

DOCUMENT CONTROL DATA - R&D		
(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)		
1. ORIGINATING ACTIVITY (Corporate author) Engineering Experiment Station Georgia Institute of Technology Atlanta, Georgia 30332		2a. REPORT SECURITY CLASSIFICATION Unclassified
		2b. GROUP
3. REPORT TITLE AN IMPROVED POINT-SOURCE COMPACT ANTENNA RANGE		
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) Interim Report - May 66 to Dec 66		
5. AUTHOR(S) (Last name, first name, initial) Holliman, Albert L.		
6. REPORT DATE March 1967	7a. TOTAL NO. OF PAGES 28	7b. NO. OF REFS 2
8a. CONTRACT OR GRANT NO. AF30(602)4269	9a. ORIGINATOR'S REPORT NUMBER(S)	
b. PROJECT NO. 4506		
c. Task No. 450604	9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
d.	RADC-TR-67-12	
10. AVAILABILITY/LIMITATION NOTICES Each transmittal of this document outside the agencies of the US Government must have prior approval of RADC (EMATA), GAFB, NY 13440.		
11. SUPPLEMENTARY NOTES RADC Project Engineer: MARTIN JAEGER EMATA/AC 315 330-2443		12. SPONSORING MILITARY ACTIVITY Rome Air Development Center Techniques Branch (EMAT) Griffiss AFB, NY 13440
13. ABSTRACT <p>A point-source "compact antenna range" was modified by installing a range reflector having a more accurate surface contour and by shielding the reflector edge and its feed with absorbing material. Stray radiation measurements and pattern measurements were made within the band from 8.2 to 12.0 GHz using a 30-inch paraboloidal test antenna. Results are compared with those obtained on a previously constructed range, and they demonstrate that the range performance was improved. Measured maximum stray radiation levels on the modified range vary from about -44 db to about -58 db with respect to the collimated radiation. Radiation patterns compare very favorably with those measured on a 700-foot outdoor antenna range.</p>		

DD FORM 1473

1 JAN 64

Unclassified

Security Classification

Unclassified
Security Classification

14 KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Ranges (Establishments) Test Facilities (Antenna Test Range Techs.)						

INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (*corporate author*) issuing the report.

2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. **REPORT DATE:** Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.

7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (*either by the originator or by the sponsor*), also enter this number(s).

10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (*paying for*) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.

Unclassified
Security Classification